



Perfecting the Air

Network Air

เย็นกาย สบายใจ ใช้เน็ตเวิร์คแอร์


ตัวแทนจำหน่ายแอร์ทุกชนิดกว่า 20 ยี่ห้อ

☎ 081-8299628

LINE @networkair

www.networkaircool.com

www.networkcooling.com

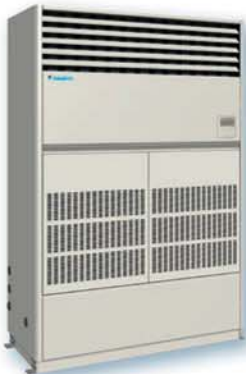

DIRECT AIR BLOW



DUCT CONNECTION



DUCT TYPE



OUTDOOR UNIT

FLOOR STANDING TYPE

INVERTER AIR COOLED PACKAGED AIR CONDITIONERS

FLOOR STANDING TYPE
DUCT TYPE

R-410A

COOLING ONLY 50Hz

INVERTER

Inverter Packaged Air Conditioner Line Up for Factories and Offices

Product Line Up **R-410A**


FLOOR STANDING TYPE		Cooling only				50Hz
Capacity	kW Btu/h	21.7 74,000	28.1 96,000	44 150,000	51.6 176,000	
FLOOR STANDING TYPE	DIRECT AIR BLOW Specifications Page 5	 FVGR08PV2S	 FVGR10PV2S			
	DUCT CONNECTION Specifications Page 5		 FVPR10PY2S	 FVPR15PY2S	 FVPR18PY2S	
OUTDOOR UNIT		 RZUR08PY2S	 RZUR10PY2S	 RZUR15PY2S	 RZUR18PY2S	

DUCT TYPE		Cooling only				50Hz
Capacity	kW Btu/h	21.7 74,000	28.1 96,000	44 150,000	51.6 176,000	
DUCT TYPE Specifications Page 6		 FDR08PY2S	 FDR10PY2S	 FDR15PY2S	 FDR18PY2S	
OUTDOOR UNIT		 RZUR08PY2S	 RZUR10PY2S	 RZUR15PY2S	 RZUR18PY2S	

DIRECT AIR BLOW

Direct air blow from indoor unit with plenum


- Comfortable factory air conditioning using multiple indoor units installed in accordance with the space.
- Installation is next to walls, so units will not affect the factory layout even if the changes are made.

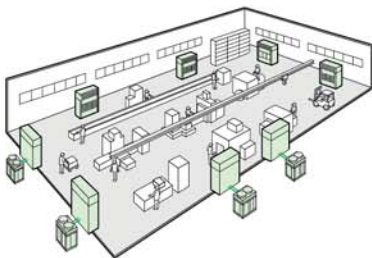

DUCT CONNECTION DUCT TYPE


Air blow via connected ducts

- Comfortable air conditioning of the entire factory by connecting a blow duct at the top of the indoor unit.
- Note: Ducts to be procured locally.

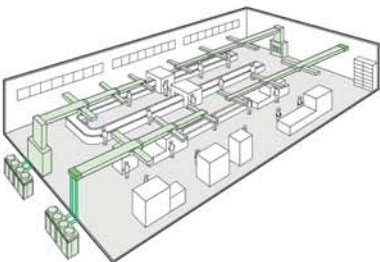



■ Extended operation range up to 49°C

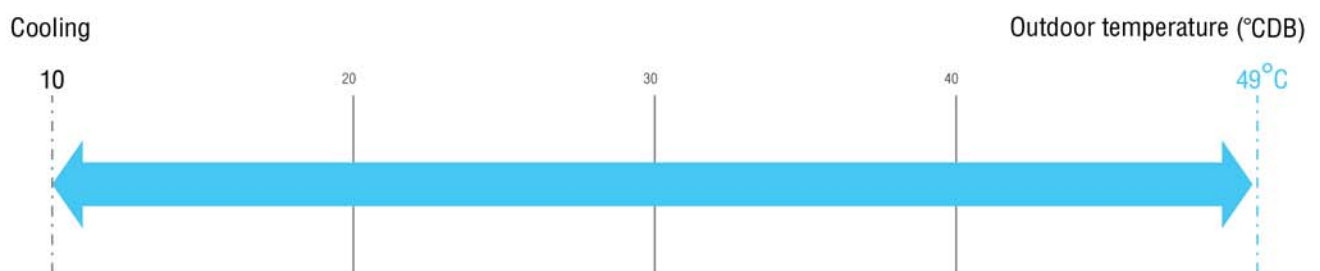


Note: When outdoor temperature falls below 10°C, the thermostat shuts OFF, the outdoor unit stops, and operation switches from cooling to fan operation.

Design flexibility

Designed for long refrigerant piping

70 m maximum length and 50 m maximum level difference to cover medium- and large-scale building needs.

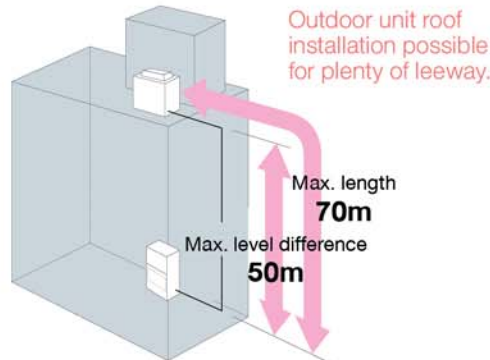

High external static pressure

The outdoor unit has been achieved high external static pressure up to 78.4 Pa, ensuring the efficient heat dissipation and stable operation of equipment in either hierarchical or intensive arrangement.



Nighttime quiet operation function

The nighttime quiet operation function automatically suppresses the nighttime operating sound by reducing operation capacity to maintain the quiet environment of the neighborhood. Three selectable modes are available depending on the required level.


*1. Initial setting is 8 hours. Can be selected from 6, 8 and 10 hours.

*2. Initial setting is 9 hours. Can be selected from 8, 9 and 10 hours.

*3. In case of RZUR10PY2S.

Notes: • This function is available in setting at site.

- The operating sound in quiet operation mode is the actual value measured by our company.
- The relationship of outdoor temperature (load) and time shown above is just an example.

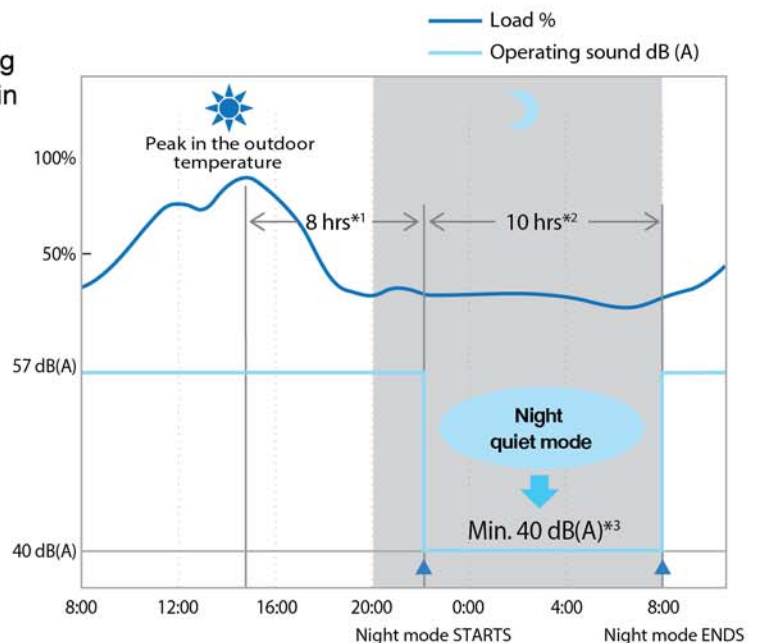

Reliability

Backup operation function

Compressor backup operation function

Emergency operation



Malfunction

* For RZUR15/18PY2S models.
 On-site settings are required using the PCB of the outdoor unit.

Centralized management system extension

Centralized management can integrate with D-BACS system with high speed data transfer. Centralized control is now available when using with Inverter packaged air conditioners. Display of air filter cleaning times and self-inspection function for simple maintenance.

High efficiency integrated control
Intelligent Touch Manager
 Lighting and ventilation control, energy use can be monitored and managed by one controller.



10.4 inch width touch screen

Enhanced varieties of factory modification

☐ Standard model
☐ Factory modification

Factory Modification	Floor Standing Type		Duct Type
	Direct Air Blow	Duct Connection	
Change fan motor and pulley	–	☐	☐
Discharge grill plenum chamber	○	☐	☐
Side discharge grill on discharge plenum chamber	☐	☐	–
Front suction high efficiency filter chamber	–	☐	–
Front suction base flange for front suction high efficiency filter chamber	–	☐	–
Suction grill for front suction high efficiency filter chamber	–	☐	–
Rear suction	–	☐	–
Drain pump	☐	☐	–
Change 2 blowers to reduce noise for direct flow	–	☐ *	–
2 step airflow by toggle switch	☐	–	–

Note:
 * For FVPR18PY2S only

Specifications

FLOOR STANDING TYPE

DIRECT AIR BLOW

Model Name	Indoor unit		FVGR08PV2S		FVGR10PV2S		
	Outdoor unit		RZUR08PY2S		RZUR10PY2S		
Cooling capacity ¹ (Max.)		Btu/h	74,000		96,000		
		kW	21.7		28.1		
Power consumption ¹		kW	7.65		9.36		
Indoor unit	Power supply		1 Phase, 220 V, 50 Hz				
	Colour		Ivory White				
	Air flow rate (H)		m ³ /min	80			
			cfm	2,830			
	Fan	Motor output		1Ø AC 0.245 + 0.245kW			
		Drive		Direct Drive 3 Speed			
	Dimensions (H× W× D)		mm	1,870 × 1,170 × 510			
	Machine weight		kg	149			
Sound level		dB(A)	61				
Drain		mm	PS 1B Internal thread				
Outdoor unit	Power supply		3 Phase, 380–415 V, 50 Hz				
	Colour		Ivory white				
	Compressor	Type	Hermetically sealed scroll type				
		Motor output	kW	3.4×1		4.5×1	
	Air flow rate (H)		m ³ /min	178			
	Dimensions (H× W× D)		mm	1,657× 930 × 765			
	Machine weight		kg	175		185	
	Sound level ²		dB(A)	56		57	
Operation range		°CDB	10 to 49				
Refrigerant charge		kg	5.9		6.7		
Refrigerant Piping	Liquid	mm	Ø 9.5 (Brazing)		Ø 22.2 (Brazing)		
	Gas	mm	Ø 19.1 (Brazing)				
Max. piping length		m	70 (equivalent length 90 m)				
Max. level difference		m	50				

FLOOR STANDING TYPE

DUCT CONNECTION

Model Name	Indoor unit		FVPR10PY2S		FVPR15PY2S		FVPR18PY2S		
	Outdoor unit		RZUR10PY2S		RZUR15PY2S		RZUR18PY2S		
Cooling capacity*1 (Max.)		Btu/h	96,000		150,000		176,000		
		kW	28.1		44.0		51.6		
Power consumption*1		kW	9.01		18.30		23.06		
Indoor unit	Power supply		3 Phase, 380 V, 50 Hz						
	Colour		Ivory White						
	Air flow rate (H)		m³/min	80	120	162			
			cfm	2,830	4,240	5,720			
	External static pressure³		Pa	147					
	Fan	Motor output		3Ø AC 1.5kW		3Ø AC 2.2kW		3Ø AC 3.7kW	
		Drive		Belt Drive					
	Dimensions (H×W× D)		mm	1,740 × 1,170 × 510		1,870 × 1,170 × 720		1,870 × 1,470 × 720	
	Machine weight		kg	156		200		250	
	Sound level		dB(A)	61		62		63	
Drain		mm	PS 1B Internal thread						
Outdoor unit	Power supply		3 Phase, 380–415 V, 50 Hz						
	Colour		Ivory white						
	Compressor	Type		Hermetically sealed scroll type					
		Motor output	kW	4.5×1		(3.5×1)+(3.5×1)		(4.9×1)+(4.2×1)	
	Air flow rate (H)		m³/min	178		257		297	
	Dimensions (H×W×D)		mm	1,657× 930× 765		1,657× 1,240 × 765			
	Machine weight		kg	185		260		291	
	Sound level*2		dB(A)	57		60		65	
	Operation range		°CDB	10 to 49					
	Refrigerant charge		kg	6.7		8.2		11.7	
Refrigerant Piping	Liquid	mm	Ø 9.5 (Brazing)		Ø 12.7 (Brazing)		Ø 15.9 (Brazing)		
	Gas	mm	Ø 22.2 (Brazing)		Ø 28.6 (Brazing)				
Max. piping length		m	70 (equivalent length 90 m)						
Max. level difference		m	50						

Note :

*1. Indoor temp.: 27°CDB, 19°CWB / outdoor temp.: 35°CDB / Equivalent piping length: 7.5 m, level difference: 0 m.

*2. Anechoic chamber conversion value, measured at a point 1 m in front of the unit at a height of 1.5 m.

During actual operation, these values are normally somewhat higher as a result of ambient conditions and oil recovery mode.

When there is concern for noise the surrounding area such as residences, we recommend investigating the installation location and taking soundproofing measures.

*3. The value is the external static pressure with standard pulley.

DUCT TYPE

Model Name	Indoor unit		FDR08PY2S	FDR10PY2S	FDR15PY2S	FDR18PY2S	
	Outdoor unit		RZUR08PY2S	RZUR10PY2S	RZUR15PY2S	RZUR18PY2S	
Cooling capacity*1 (Max.)		Btu/h	74,000	96,000	150,000	176,000	
		kW	21.7	28.1	44.0	51.6	
Power consumption*1		kW	8.47	10.11	19.34	26.49	
Indoor unit	Power supply		3 Phase, 380 V, 50 Hz				
	Colour		Ivory White				
	Air flow rate (H)	m³/min	78		166		
		cfm	2,750		5,860		
	External static pressure*3		Pa		98		
	Fan	Motor output		3Ø AC 1.5kW		3Ø AC 3.7kW	
		Drive		Belt drive			
	Dimensions (H× W× D)		mm	500× 1,330× 850		625× 1,980× 850	
	Machine weight		kg	108		202	
Sound level		dB(A)	53		60		
Drain		mm	PS 3/4B Internal thread		PS 1B Internal thread		
Outdoor unit	Power supply		3 Phase, 380–415 V, 50 Hz				
	Colour		Ivory white				
	Compressor	Hermetically sealed scroll type					
		Motor output	kW	3.4×1	4.5×1	(3.5×1)+(3.5×1)	(4.9×1)+(4.2×1)
	Air flow rate (H)		m³/min	178		257	297
	Dimensions (H× W× D)		mm	1,657× 930 × 765		1,657× 1,240 × 765	
	Machine weight		kg	175	185	260	291
	Sound level*2		dB(A)	56	57	60	65
	Operation range		°CDB	10 to 49			
Refrigerant charge		kg	5.9	6.7	8.2	11.7	
Refrigerant Piping	Liquid	mm	Ø 9.5(Brazing)		Ø 12.7 (Brazing)	Ø 15.9 (Brazing)	
	Gas	mm	Ø 19.1 (Brazing)	Ø 22.2 (Brazing)	Ø 28.6 (Brazing)		
Max. piping length		m	70 (equivalent length 90 m)				
Max. level difference		m	50				

Note :

*1. Indoor temp.: 27°CDB, 19°CWB / outdoor temp.: 35°CDB / Equivalent piping length: 7.5 m, level difference: 0 m.

*2. Anechoic chamber conversion value, measured at a point 1 m in front of the unit at a height of 1.5 m.

During actual operation, these values are normally somewhat higher as a result of ambient conditions and oil recovery mode.

When there is concern for noise the surrounding area such as residences, we recommend investigating the installation location and taking soundproofing measures.

*3. The value is the external static pressure with standard pulley.

Option

FLOOR STANDING TYPE

Option	Direct Air Blow	Duct Connection		
	FVGR-PV2S	FVPR10PY2S	FVPR15PY2S	FVPR18PY2S
Discharge grill plenum chamber (Including pulley and belt)	—	BPCV10P	BPCV16P	BPCV20P

DUCT TYPE

Option	FDR08/10PY2S	FDR15/18PY2S
Discharge grill plenum chamber (Including pulley and belt)	BPCD10P	BPCD20P

CONTROL SYSTEM

Option	FVGR-PV2S	FVPR-PY2S	FDR-PY2S
Simplified remote controller	—	—	BRC2E61
Navigator remote controller	—	—	BRC1E63
Wiring adaptor for electrical appendices (Group control adaptor)	KRP4AA51 ★		
Adaptor for wiring (operation status output)	BRP11B61		
Remote sensor (for indoor temperature)	BRCS01A-1		
Mounting plate for adaptor PCB	—	—	BRP45A ☆


Note :

Mounting plate ☆ is necessary for each adaptor marked ★.

FAN PERFORMANCE


FLOOR STANDING TYPE

DUCT CONNECTION

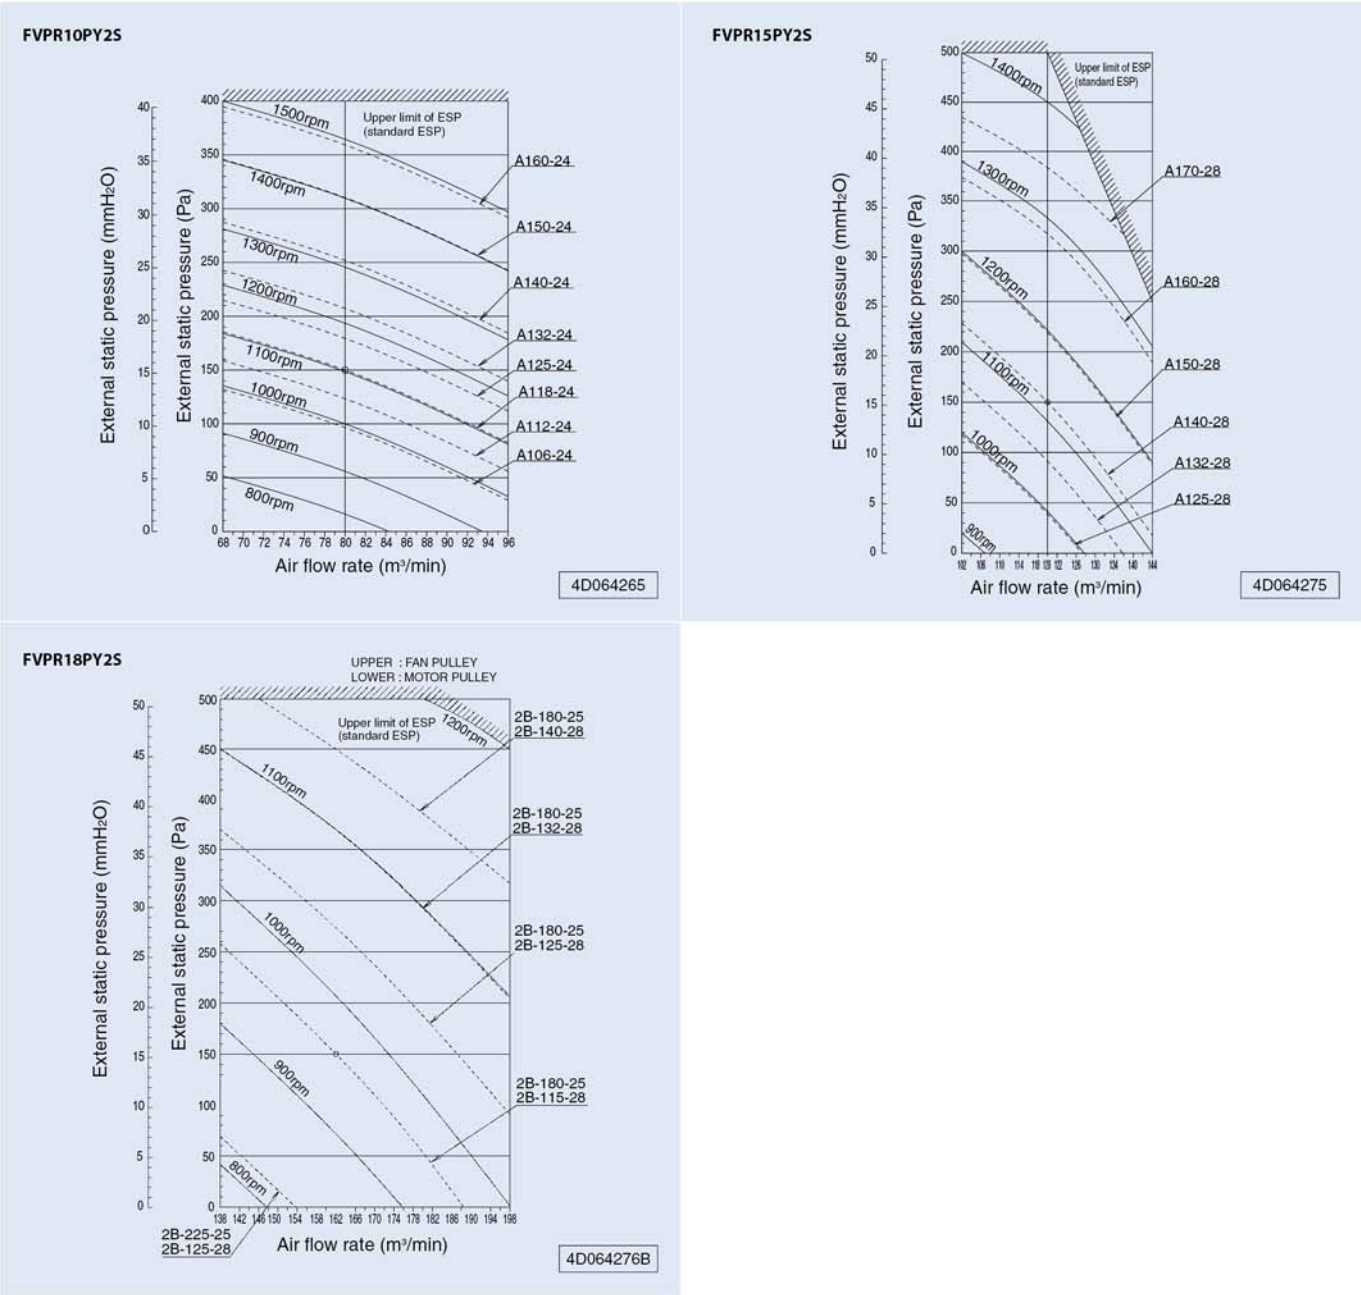


DUCT TYPE

FDR08PY2S
FDR10PY2S

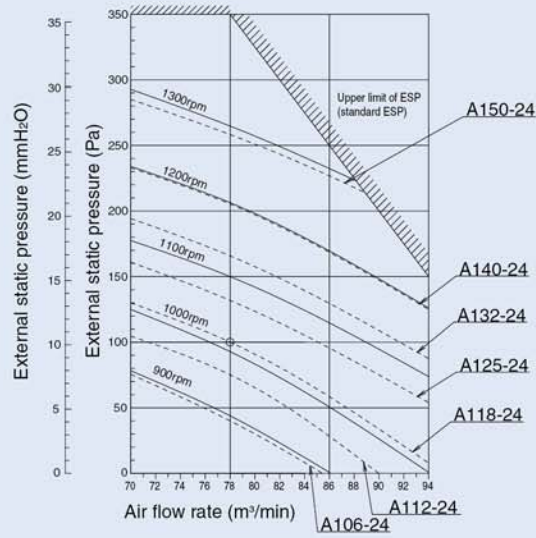

4D064280

FDR15PY2S
FDR18PY2S

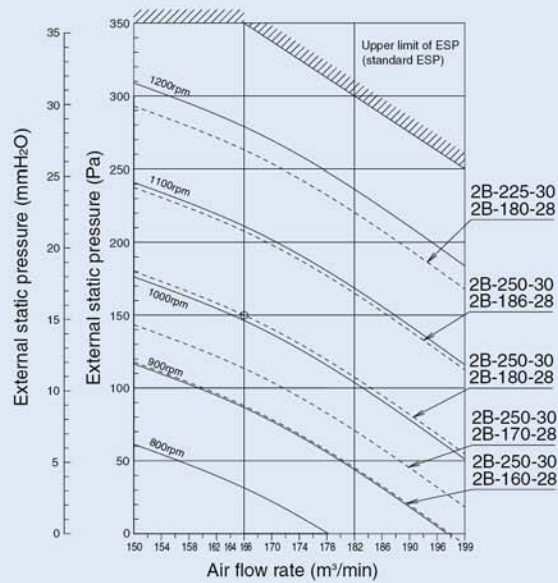


4D064282A

Wiring Diagrams


OUTDOOR UNIT

RZUR08PY2S

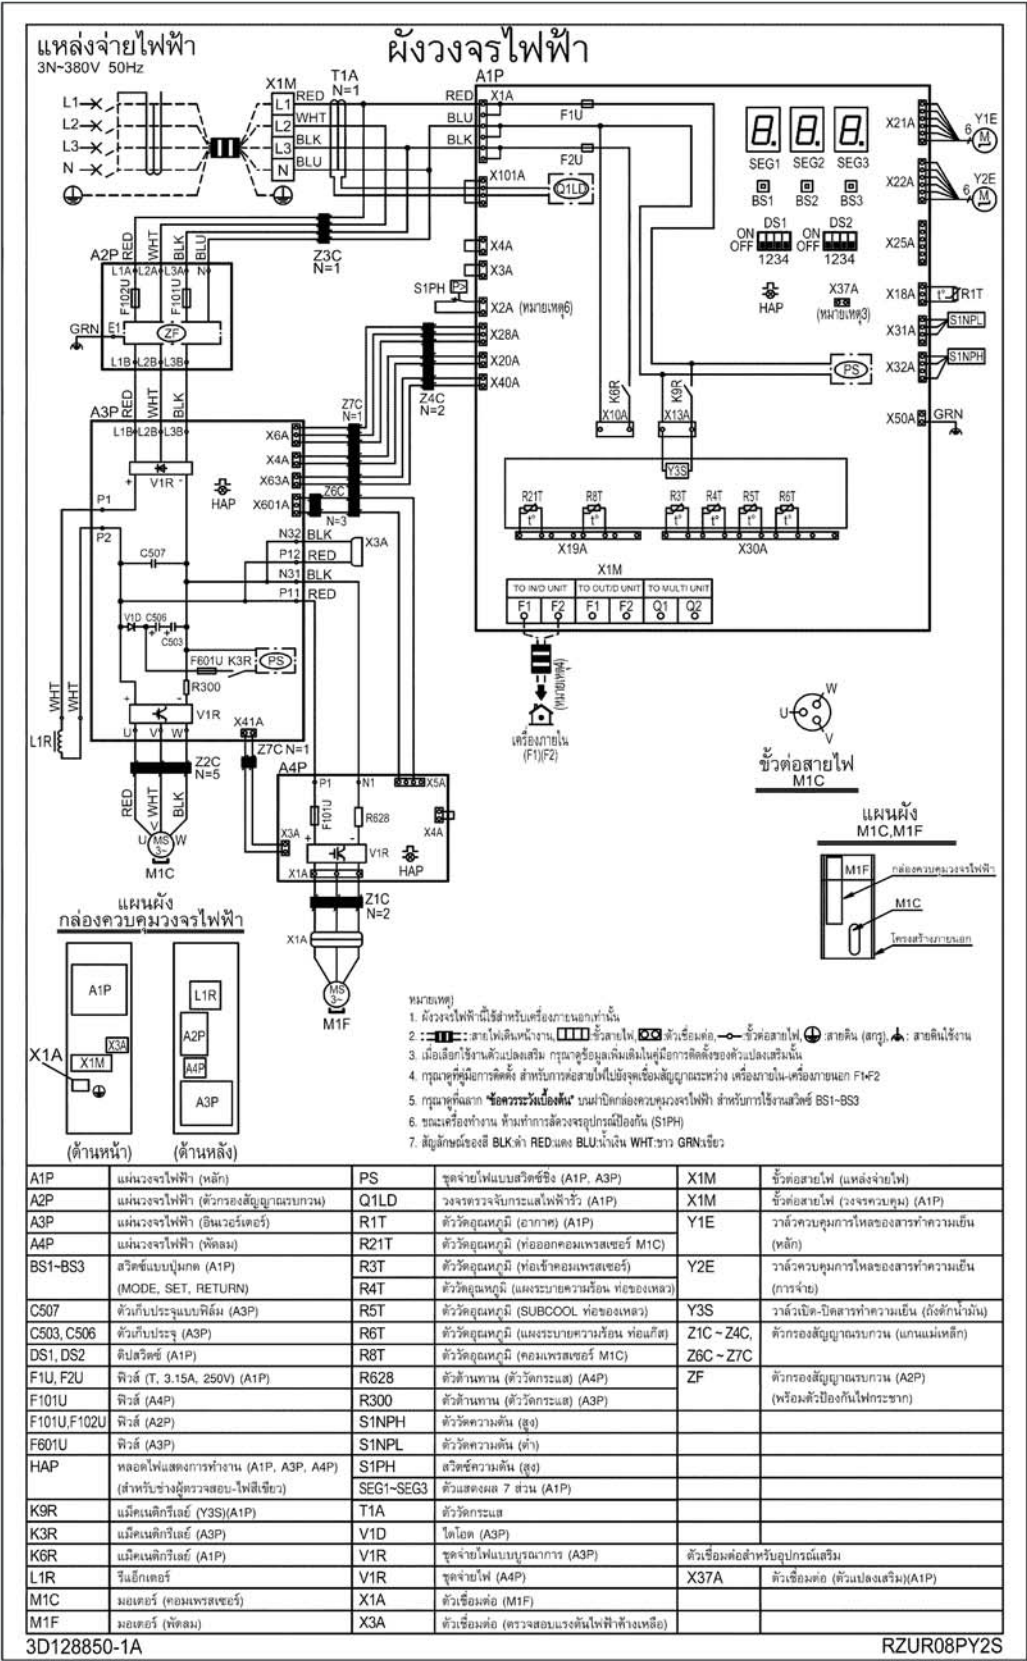

Wiring Diagrams

RZUR15PY2S
RZUR18PY2S

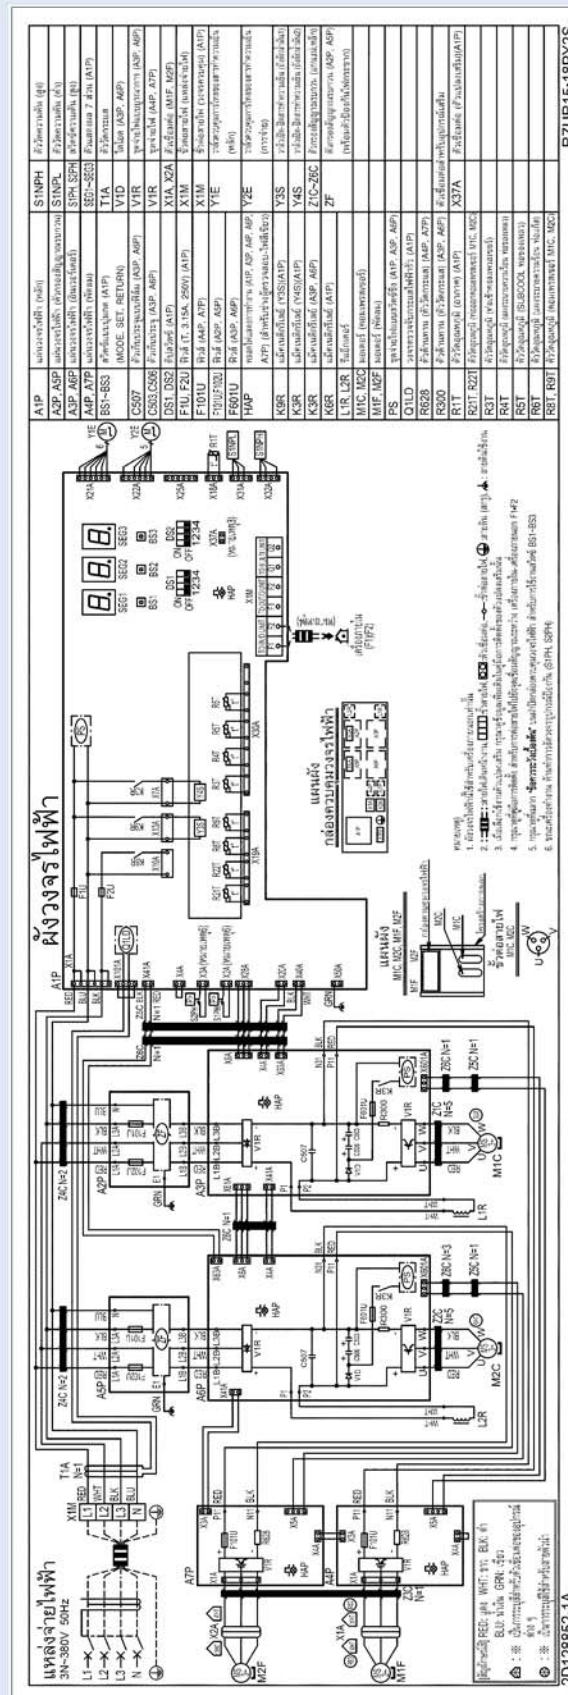


2D128852A

Piping Diagrams


OUTDOOR UNIT

RZUR08PY2S
RZUR10PY2S

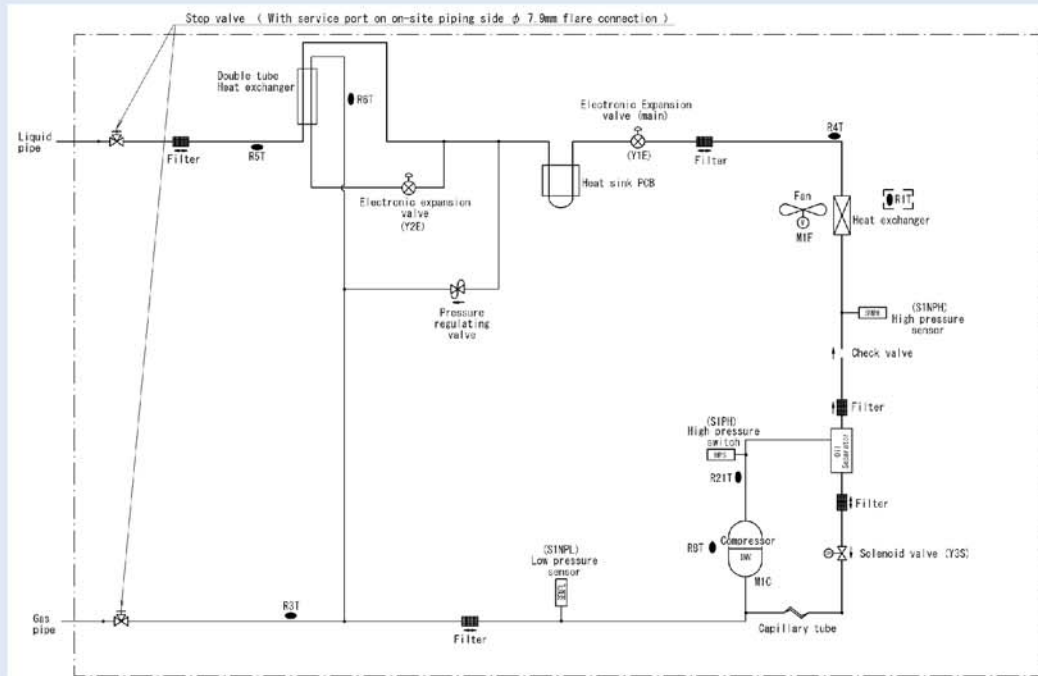

3D130368

RZUR15PY2S
RZUR18PY2S

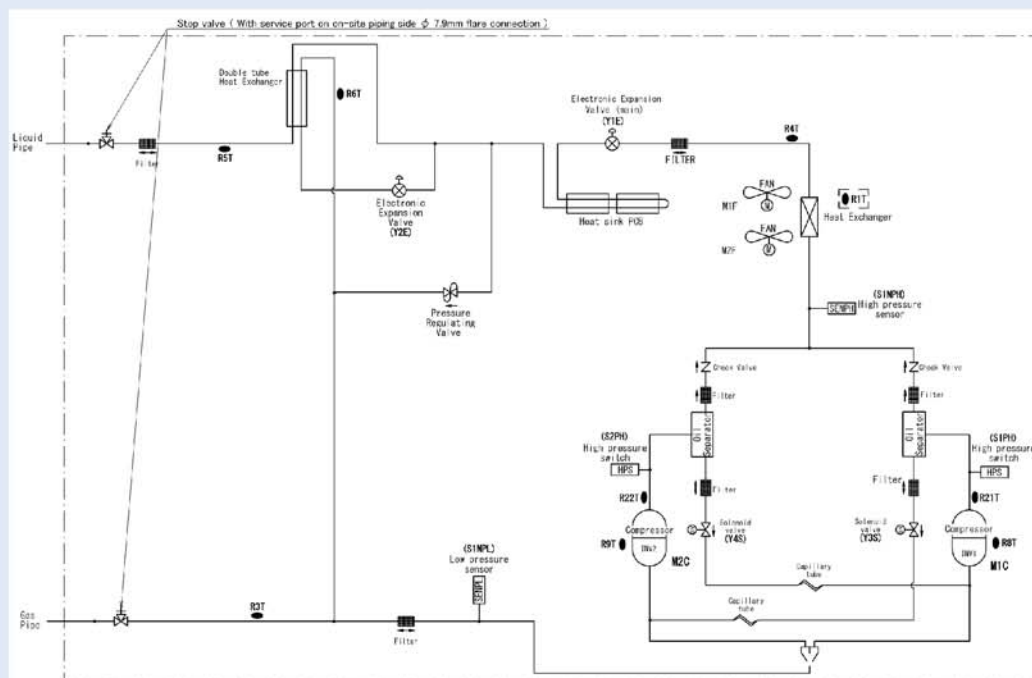


3D130373

DIMENSIONS (Unit: mm)


FLOOR STANDING TYPE

DIRECT AIR BLOW

FVGR08PV2S
FVGR10PV2S

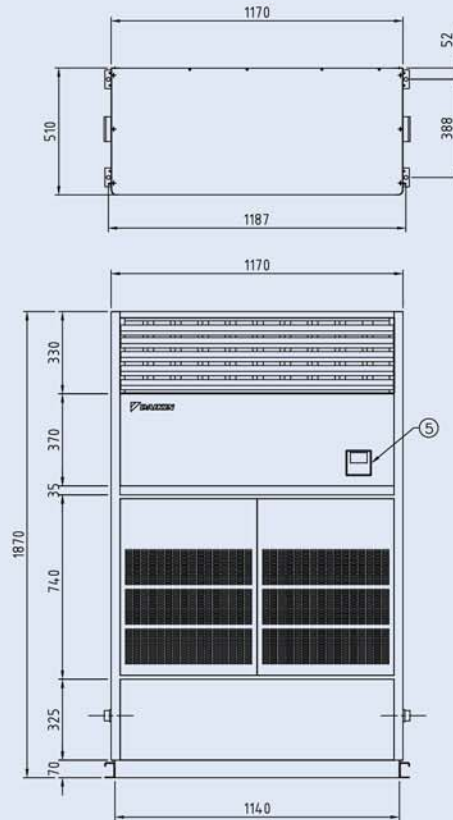


- ① Liquid pipe conn. ϕ 9.52 C1220T brazing
- ② Gas pipe conn.:
 ϕ 19.1 C1220T brazing for FVGR08PV2S
 ϕ 22.2 C1220T brazing for FVGR10PV2S
- ③ Upper drain outlet (PS 1B Internal thread)
- ④ Power supply & control wire intake
- ⑤ Digital remote controller

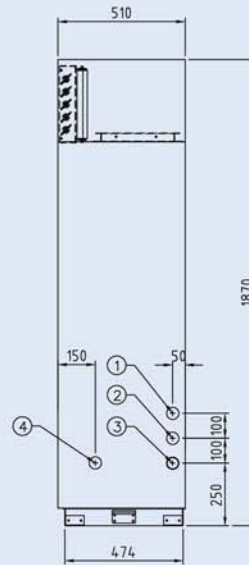




SDR3150202
SDR3150203

DUCT CONNECTION

FVPR10PY2S



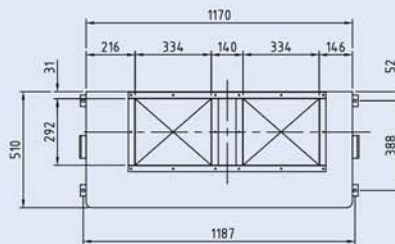


- ① LIQUID PIPE CONN. ϕ 9.52 C1220T BRAZING
- ② GAS PIPE CONN. ϕ 22.2 C1220T BRAZING
- ③ UPPER DRAIN OUTLET PS 1B INTERNAL THREAD
- ④ POWER SUPPLY & CONTROL WIRE INTAKE
- ⑤ DIGITAL REMOTE CONTROLLER

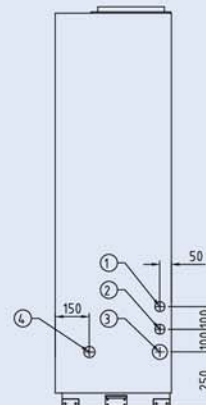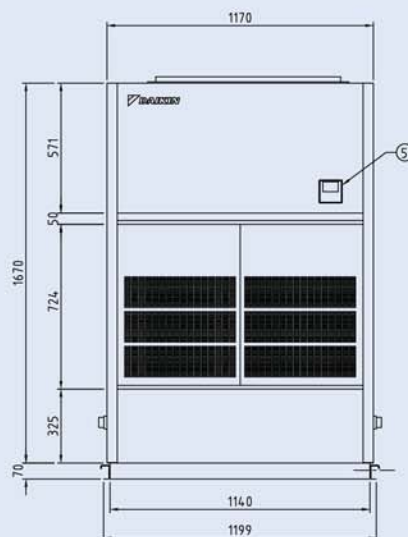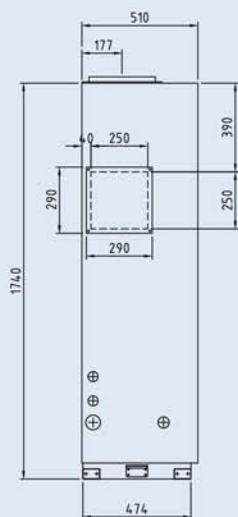

SDR3150204

FVPR15PY2S
FVPR18PY2S

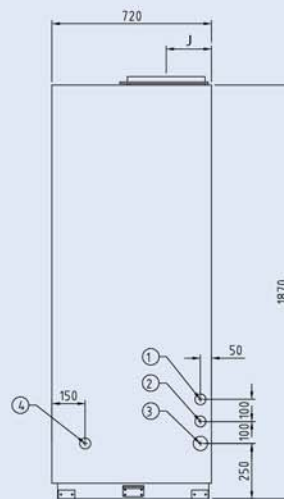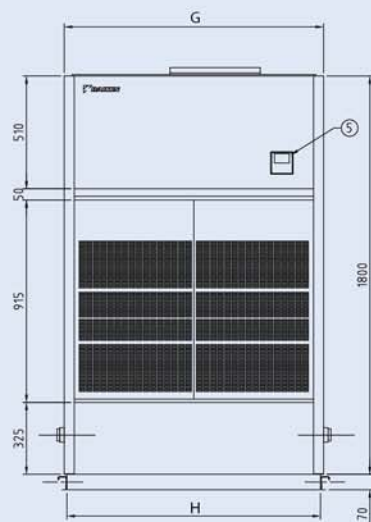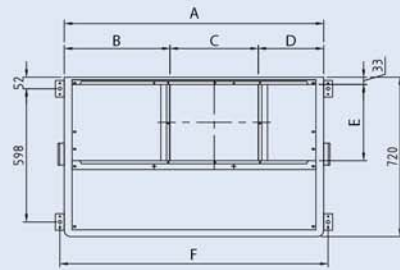


	A	B	C	D	E	F	G	H	J	K
FVPR15PY2S	1170	477	398	295	344	1187	1170	1144	205	φ12.7
FVPR18PY2S	1470	558	474	438	407	1487	1470	1444	237	φ15.9

- ① Liquid pipe conn. (K) C1220T brazing
- ② Gas pipe conn. ø 28.6 C1220T brazing
- ③ Upper drain outlet (PS 1B Internal thread)
- ④ Power supply & control wire intake
- ⑤ Digital remote controller

SDR3150205
 SDR3150206


OUTDOOR UNIT

RZUR08PY2S RZUR10PY2S

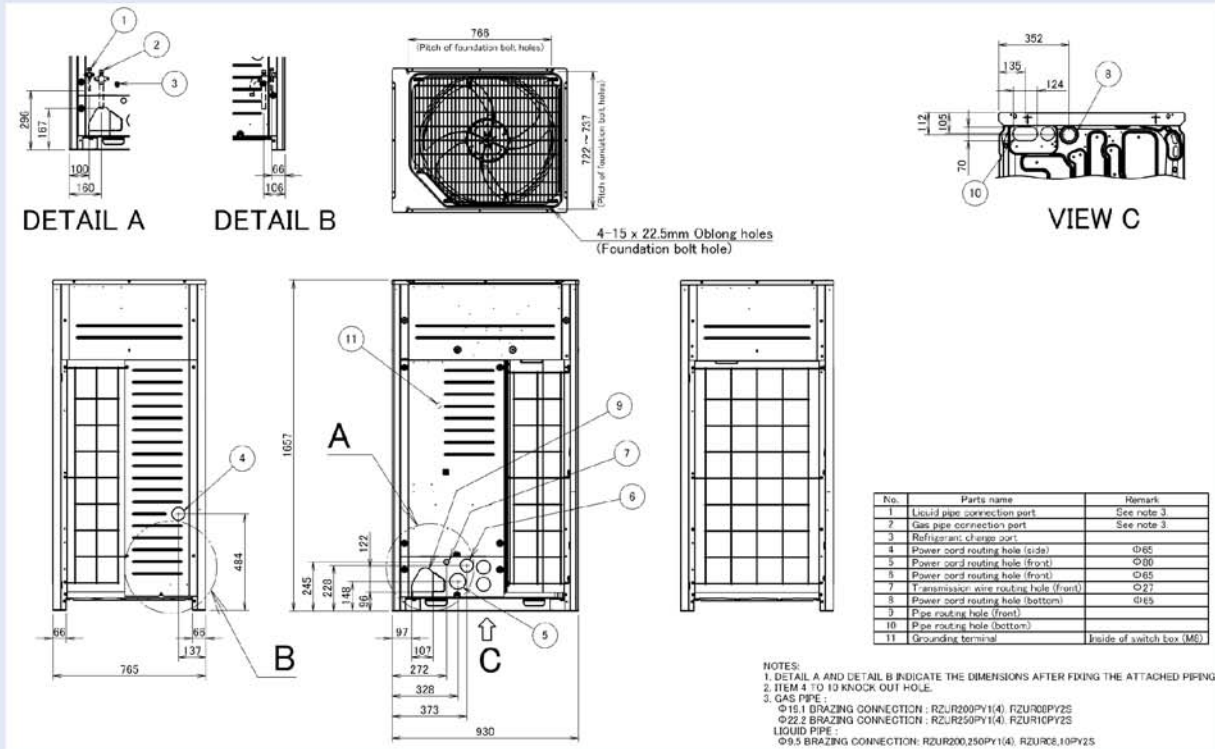







3D129057

RZUR15PY2S RZUR18PY2S

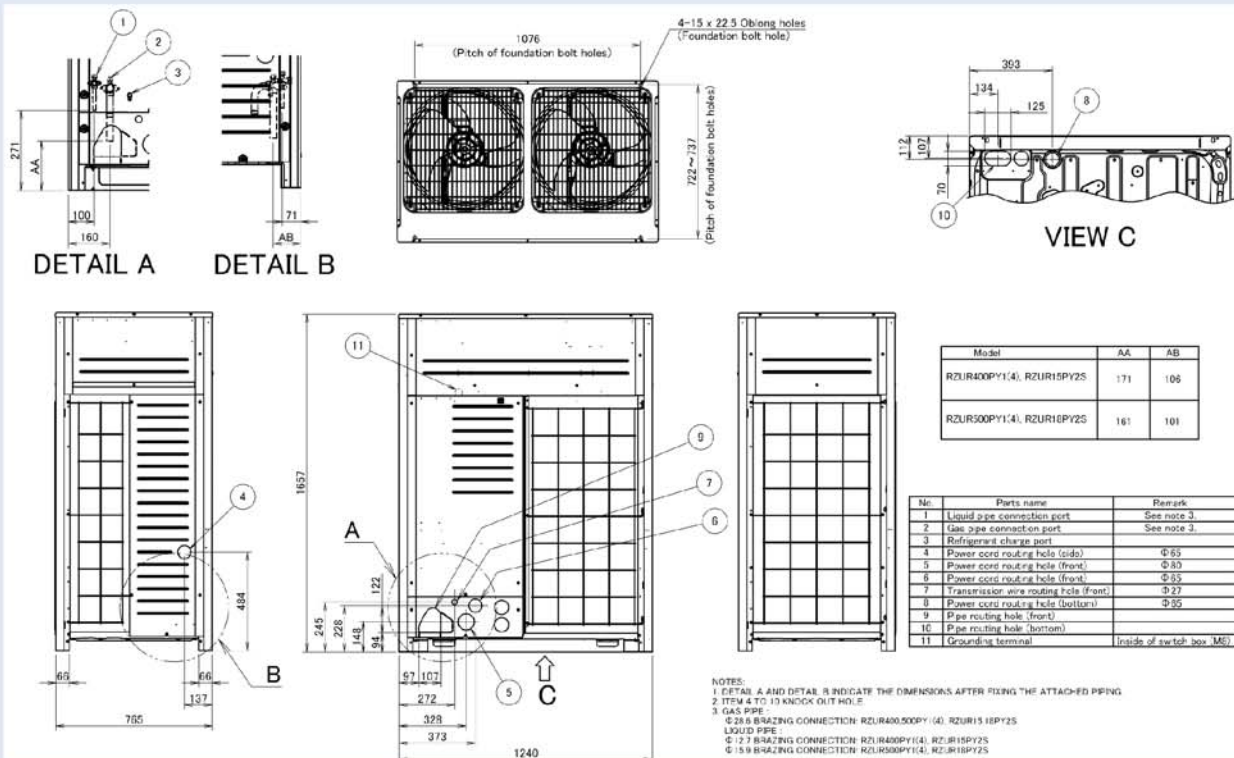




3D129058A

Space required for indoor unit installation (U

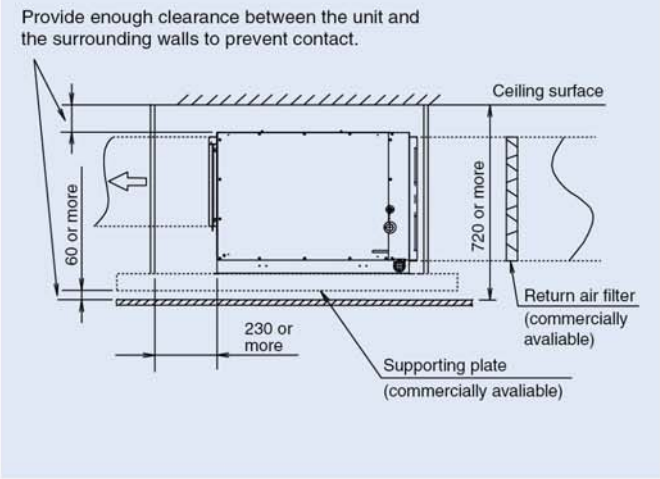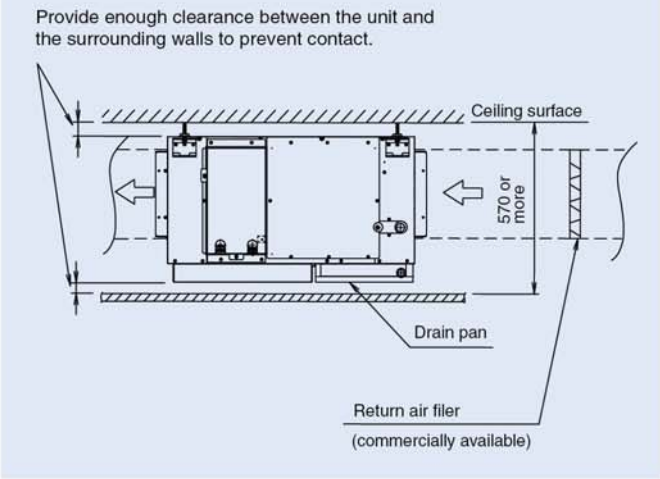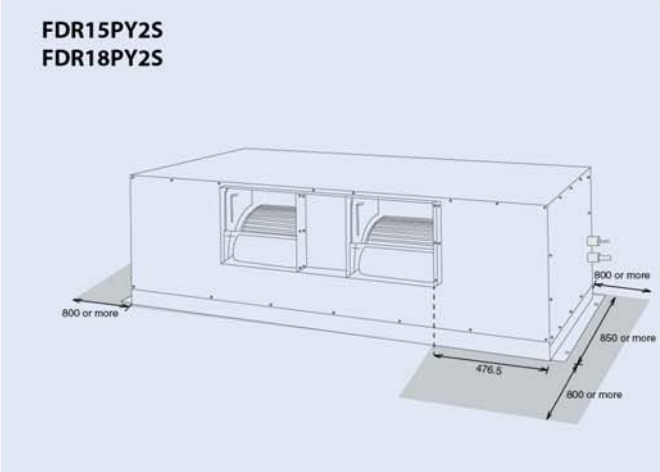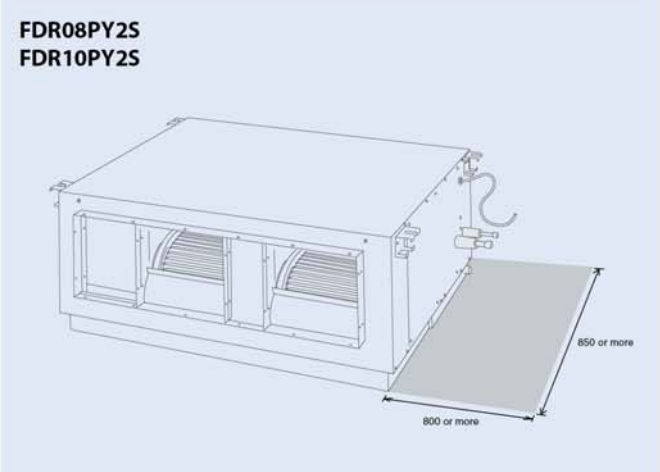
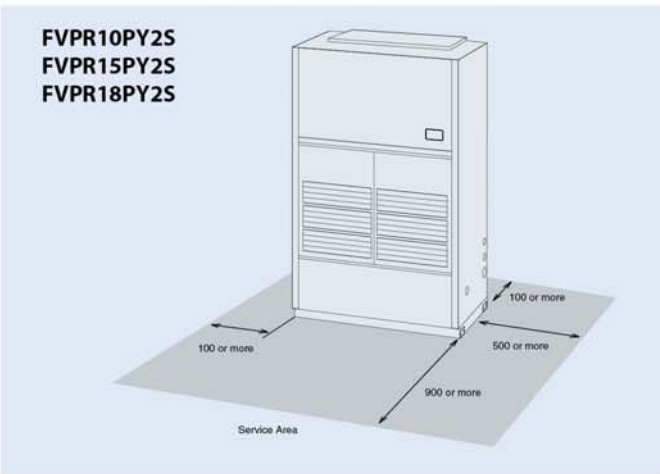
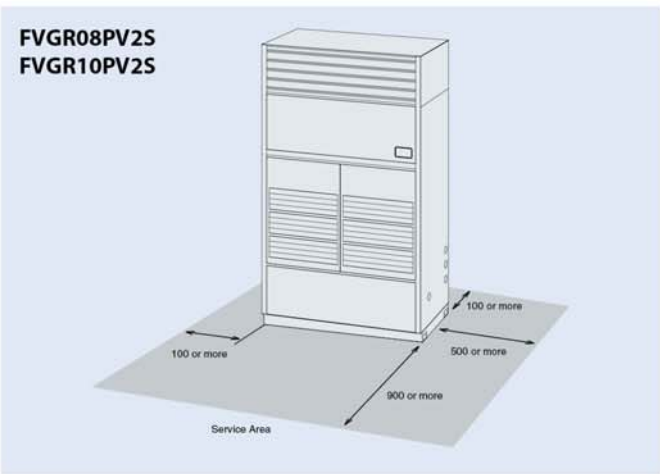


RZUR08PY2S / RZUR10PY2S / RZUR15PY2S / RZUR18PY2S (Please refer to engineering databook for other installation patterns.)







For single unit installation



For installation in rows

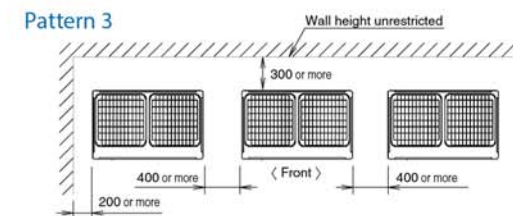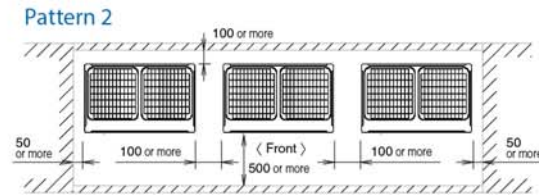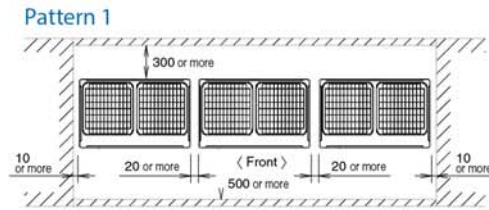

For centralized group layout

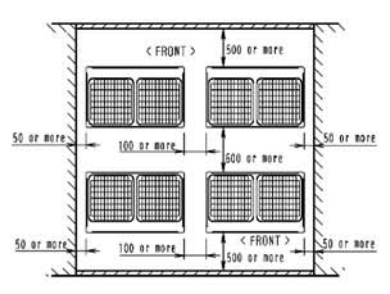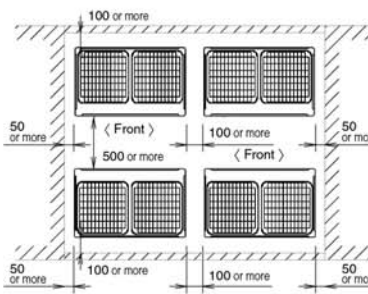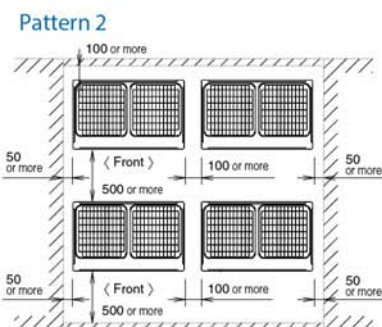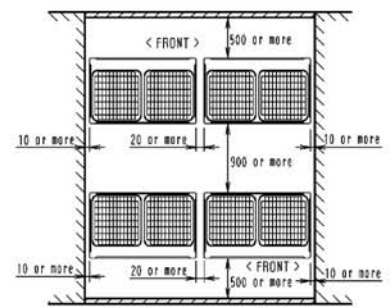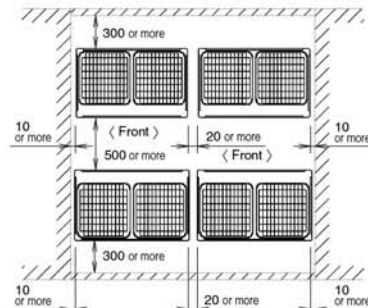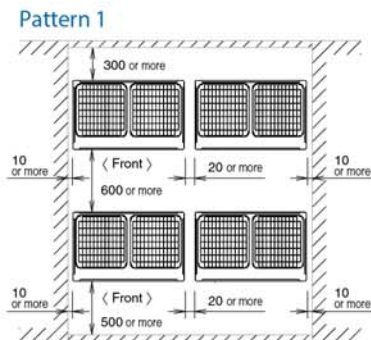

(Unit : mm)

Notes:

1. Heights of walls in case of Patterns 1 and 2:

Front : 1500 mm

Suction side : 500 mm

Side : Height unrestricted.

Installation space to be shown in this drawing is based on the cooling operation at 35 degrees outdoor air temperature.


When the design outdoor air temperature exceeds 35 degrees or the load exceeds maximum ability because of much generation load of heat in all outdoor unit, take the suction side space more broadly than the space to be shown in this drawing.

2. If the above wall heights are exceeded then h2/2 and h1/2 should be added to the front and suction side service spaces respectively as shown in the figure on the right.

3. When installing the units most appropriate pattern should be selected from those shown above in order to obtain the best fit in the space available always bearing in mind the need to leave enough space for a person to pass between units and wall and for the air to circulate freely.

(If more units are to be installed than are catered for in the above patterns your layout should take account of the possibility of short circuits.)

4. The units should be installed to leave sufficient space at the front for the on site refrigerant piping work to be carried out comfortably.

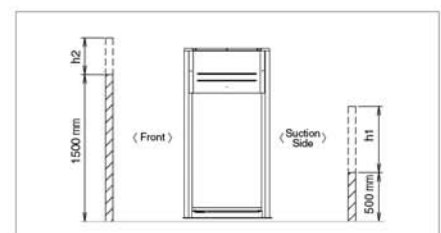

Warning



- Ask a qualified installer or contractor to install this product. Do not try to install the product yourself. Improper installation can result in water or refrigerant leakage, electrical shock, fire or explosion.
- Use only those parts and accessories supplied or specified by Daikin. Ask a qualified installer or contractor to install those parts and accessories. Use of unauthorised parts and accessories or improper installation of parts and accessories can result in water or refrigerant leakage, electrical shock, fire or explosion.
- Read the user's manual carefully before using this product. The user's manual provides important safety instructions and warnings. Be sure to follow these instructions and warnings.

Notice



- About harmonics, since this product is equipped with an inverter, harmonics will be generated. If local laws require the suppression of harmonics on the building, please take harmonic suppression measures on the electrical equipment side. Please contact your local sales company for details.

If you have any enquiries, please contact your local importer, distributor and/or retailer.

Cautions on product corrosion

1. Air conditioners should not be installed in areas where corrosive gases, such as acid gas or alkaline gas, are produced.
2. If the outdoor unit is to be installed close to the sea shore, direct exposure to the sea breeze should be avoided. If you need to install the outdoor unit close to the sea shore, contact your local distributor.

SIAM DAIKIN SALES CO.,LTD.

22 Soi On Nut 55/1
Prawet Subdistrict, Prawet District
Bangkok 10250

Tel. 0-2838-3200
Fax. 0-2721-7607

