


PACKAGE WATER COOL DUCT TYPE


The YORK Package Water Cool Duct Type Air-conditioner are designed for indoor installation free-blow or duct Air-conditioning system the self-contained package unit consists of compressor, condensor, evaporator coil, fan motor auxillary controls and safety devices. It is ideal for quick and low cost installation, economical and reliable operation.

FEATURE

- Energy Efficient Reliable Compressor, high efficiency hermetic, refrigerant cooled compressor.
- High Efficiency Condenser, the refrigerant and water are circulated, which the heat quicker and more efficiently.
- Easy and Flexible Installation, all units are completely factory assembled, evacuated, dehydrated, precharge with R-22 and tested to make installation simple.
- Minimize Floor Space Requirement, units are compact of design which reduce valuable floor space requirement.
- Accessibility and Ease of Servicing, removable, heavy gauge panels are available for easy access to compressor, condenser and evaporator during servicing or replacement.

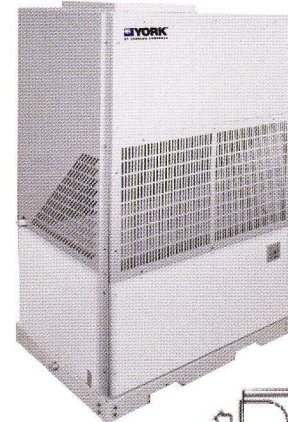

Vertical Blow
Standard Model



Horizontal Blow
Option Model

MODEL EWX-P		060	080	100	120	150	180	250	300	350	450	550
NOMINAL CAPACITY	Btu/hr	60,600	80,000	110,000	120,000	168,000	185,000	250,000	300,000	350,000	450,000	550,000
	kW	17.8	23.4	32.2	35.2	49.2	54.2	73.3	87.9	102.6	131.9	161.2
POWER CONSUMPTION	WATT INPUT	4857	6026	7777	9485	11485	14190	19890	23790	28939	35439	46069
UNIT WEIGHT	kg	850	900	1050	1200	1250	1300	1500	1650	1700	1750	1850
POWER SUPPLY	V-PH-Hz	380-5-50										
TOTAL CURRENT	AMP	8.8	12.5	15.8	17.6	25.6	27.2	35.1	43.4	54.4	70.2	76.4
REFRIGERANT	TYPE	R-22/R-407C										
CHARGE	kg	4	5.2	6.6	8.0	10.0	12.3	16.7	20.0	23.3	30.0	36.7
COMPRESSOR	TYPE	SCROLL										
	hp	5.5	7	9	10	13	16.8	20.8	26.7	31.7	20.8/20.8	26.7/26.7
	WATT INPUT	3870	4370	6000	7050	9050	10900	14100	18000	21000	28200	36000
	AMP	7.2	10	11.5	13.3	17	21.9	26.5	38.85	45.5	26.5/26.5	38.85/38.85
CONDENSER	TYPE	SHELL & TUBE										
	QTY	1	1	1	1	1	1	1	1	1	1	1
INDOOR FAN	TYPE	DIRECT										
	CFM	2000	2600	3400	4000	5000	6000	8400	10000	11600	15000	18300
STD FAN	RPM	900	768	838	746	756	627	664	658	660	520	466
MOTOR	hp	0.75	1	1.5	2	3	3	5.5	5.5	7.5	7.5	10
	WATT INPUT	987	1296	1777	2435	2435	3290	5790	5790	7239	7239	10069
INDOOR												
No. OF ROWS...FIN/INC		3-15	3-15	3-15	3-15	3-15	3-15	4-15	3-15	4-15	4-15	3-15
TOTAL FACE AREA (SQ.FT)		5	6.25	6.25	7.916	11.875	11.875	15.75	19.16	19.16	24.95	40.9
RETURN AIR FILTERS	TYPE	ALUMINIUM										
PRESSURE STAT		SETTING (PSI)										
HIGH CUT-OUT	PSI	350	350	350	350	350	350	350	350	350	350	350
HIGH CUT-IN	PSI	280	280	280	280	280	280	280	280	280	280	280
LOW CUT-OUT	PSI	27	27	27	27	27	27	27	27	27	27	27
LOW CUT-IN	PSI	67	67	67	67	67	67	67	67	67	67	67
DIMENSION	HIGHT(cm)	164.5	194.5	194.5	194.5	194.5	194.5	194.5	194.5	194.5	225	225
	WIDTH(cm)	92.7	98	98	113	137.5	137.5	177	211.5	211.5	211	265.5
	DEPTH(cm)	71	81	81	81	100.5	100.5	100.5	122.5	122.5	134.5	149.5
WATER CONNECTION												
INLET	inch	2	2	2	2	2	2	2	2	2 1/2	3	3
OUTLET	inch	2	2	2	2	2	2	2	2	2 1/2	3	3

NOTE: NOMINAL TOTAL CAPACITY BASED ON NOMINAL EVAPORATOR AIR 19.4°C ENTERING WET BULB AND 35°C CONDENSER LEAVING WATER TEMPERATURE

บริษัท จอห์นสัน คอนโทรลส์ อินเทอร์เน็ต (ประเทศไทย) จำกัด

719 อาคาร เอ พี เอ็น ทาวเวอร์ ชั้น 8 ถนนพระรามเก้า แขวงบางกะปิ เขตห้วยขวาง กรุงเทพมหานคร 10310

โทรศัพท์ 0-2717-1260-80 โทรสาร 0-2717-1327-8 Website : <http://www.yorkthai.com>

สาขาเชียงใหม่

168/5-7 ถนนเชียงใหม่-ลำปาง ตำบลป่าตัน อำเภอเมือง จังหวัดเชียงใหม่ 50300

โทรศัพท์ 053-413095-6, 053-413069 โทรสาร 053-413090

สาขาทะลิ่งใหญ่

638/6-8 ถนนเพชรเกษม ตำบลตลาดใหญ่ อำเภอลำลูกเกด จังหวัดสงขลา 90110

โทรศัพท์ 074-237762, 074-238587 โทรสาร 074-365913

สาขากว๊าน

9, 11 ถนนพัฒนา ซอย 3 ตำบลตลาดเหนือ อำเภอเมือง จังหวัดภูเก็ต 83000

โทรศัพท์ 076-256992-5 โทรสาร 076-256996

สาขายอนแก่น

90/7 หมู่ที่ 14 ถนนมิตรภาพ ตำบลในเมือง อำเภอเมืองขอนแก่น จังหวัดขอนแก่น 40000

โทรศัพท์ 043-348706-8 โทรสาร 043-348710

สาขาพิจิตร

131/54 หมู่ที่ 9 ถนนสุขุมวิท ตำบลหนองปรือ อำเภอบางละมุง จังหวัดชลบุรี 20150

โทรศัพท์ 038-378190-4 โทรสาร 038-378195

สาขาหัวหิน

4/15 ถนนเพชรเกษม ตำบลหัวหิน อำเภอหัวหิน จังหวัดประจวบคีรีขันธ์ 77110

โทร. 032-547108, 032-547291, 032-547726 โทรสาร. 032-547690

OHSAS 18001:2007

TIS 18001:1999

ISO 9001:2008

ISO 14001:2004



COOL LINE
1490
เรียก ยอร์ค